

IBC/TOTE TANK HEATERS

**IBC/Tote Tank Immersion Heaters**  
(TTI Series)

- ▶ **Maximum thermal efficiency** – Twice the heat-up rate compared to standard wrap-around heaters\*
- ▶ **Easy installation/universal fit** – Screws directly into top of tank
- ▶ **Adjustable control**
- ▶ **Grounded for safety**
- ▶ **Ideal for non-acidic materials**



Plug and Play

**Specifications:**

**Voltage:** 120 or 240 VAC  
**Wattage:** 1500  
**Flange Connection Type:** 2 in (51 mm) NPS Bushing –Adapter included  
**Immersion Length:** 34 in (864 mm) with bottom 18 in (457 mm) heated  
**Temperature Range:** up to 167°F (75°C)  
**Temperature Display:** 3-digit digital  
**Heater Construction:** Incoloy 840  
**Controller Ingress Protection Rating:** IP55  
**Accuracy:** 0.2°F (0.1°C)  
**Alarm:** High-limit visual at 180°F (82°C)  
**Power Cord:** 10 ft (3 m) long  
 120V includes standard 3-prong plug (NEMA 5-15)  
 240V includes bare wire leads

**Caution:** The heating element should be fully submerged and should not be used with highly-concentrated acids

\*When paired with insulator

**Ordering Information:**


Part No.	Voltage	Temperature Display Units	Wattage	Length in (mm)
TTI120	120	°F	1500	34 (864)
TTI240	240	°F	1500	34 (864)
TTI240C	240	°C	1500	34 (864)

Other sizes and styles of immersion heaters are available upon request

Get **even faster heat-ups** when used with a **BriskHeat<sup>®</sup> Wet-area IBC Insulator or Heater.**

See options starting on [page 5-20](#)

**NEW!**

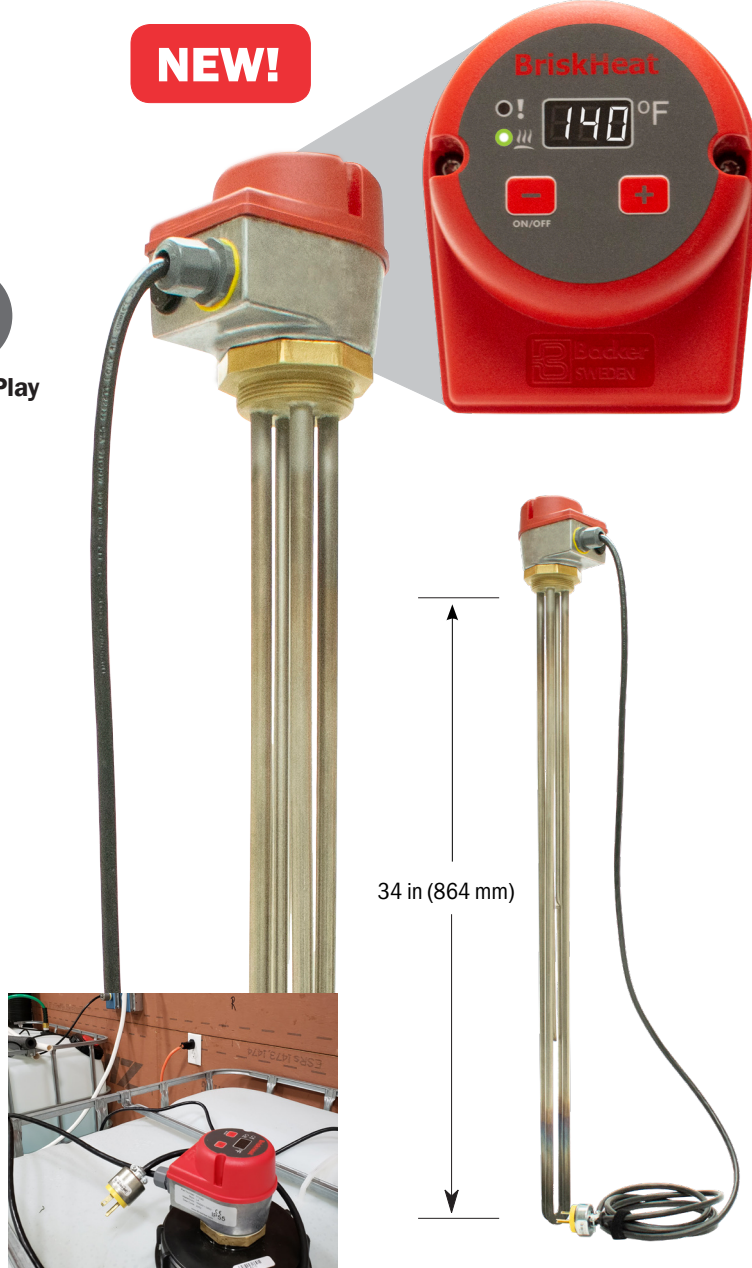

Screws directly onto top of tank - Included screw-on cap adapter provides a universal fit and easy installation

**NEW!**

